Create Something

Extraordinary

KitchenAid

FOR THE WAY IT'S MADE.®

KitchenAid® Ventilation Specifications & Dimensions

Wall-Mount Canopy Hoods

PRODUCT DIMENSIONS

KXW2336Y, KXW2330Y

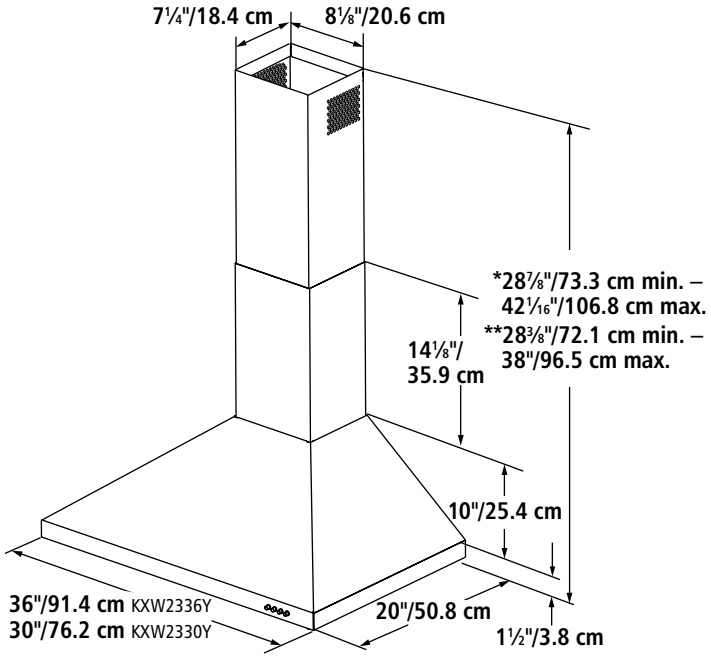

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

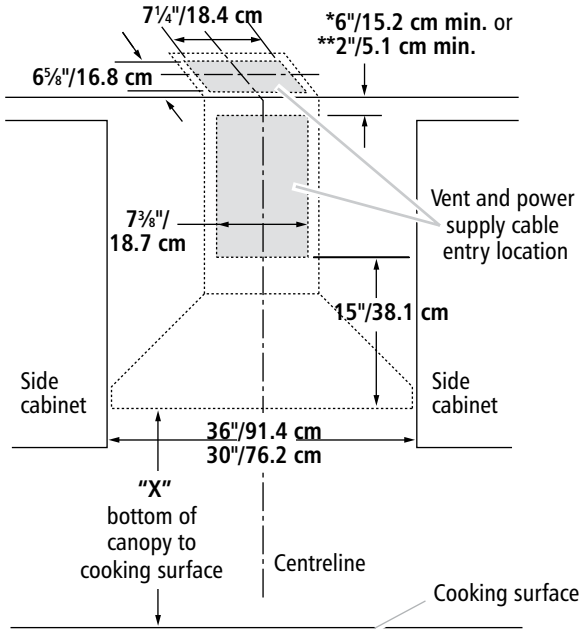

*For non-vented (recirculating) installation

**For vented installation

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 4⅜" and 9' 2" (224.5 cm and 279.4 cm).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 4⅞" and 9' 6" (225.7 cm and 289.6 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10337357) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXW2536Y, KXW2530Y

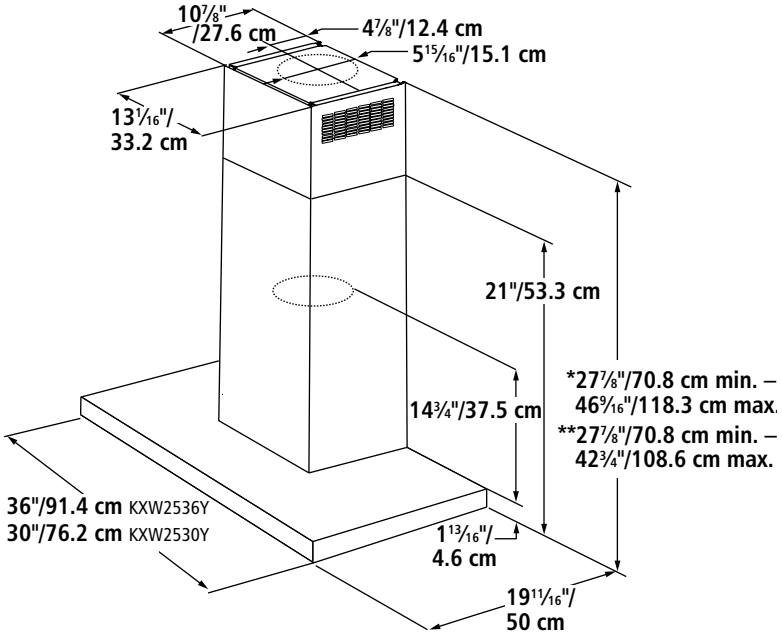

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

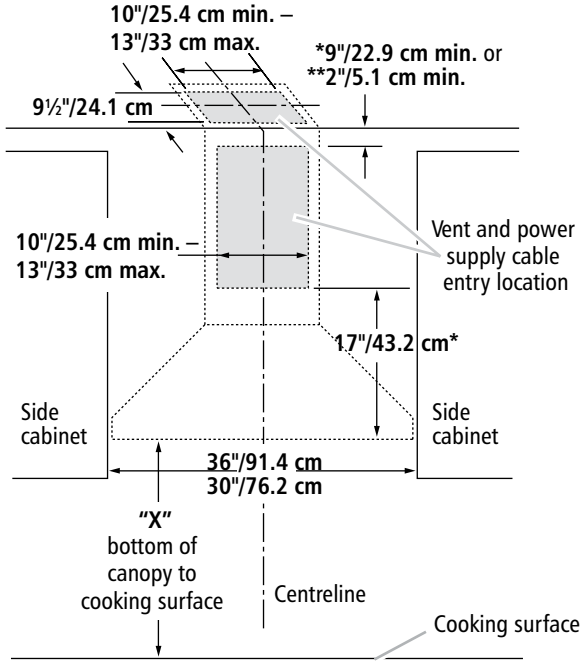

*For non-vented (recirculating) installation

**For vented installation

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 11" and 9' 0" (241.3 cm and 274.3 cm).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 11" and 9' 6" (241.3 cm and 289.6 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10294735) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXW4336Y, KXW4330Y

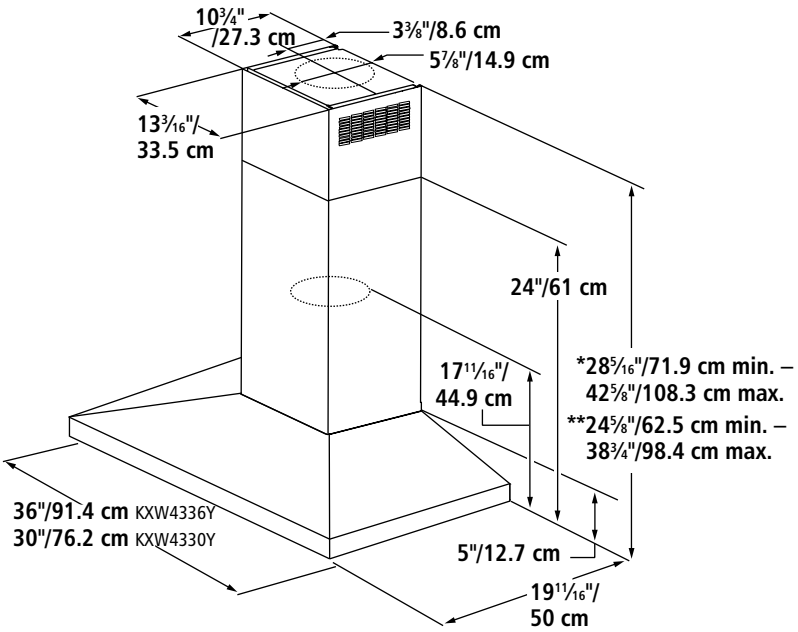

*For non-vented (recirculating) installation
**For vented installation

CUTOUT DIMENSIONS

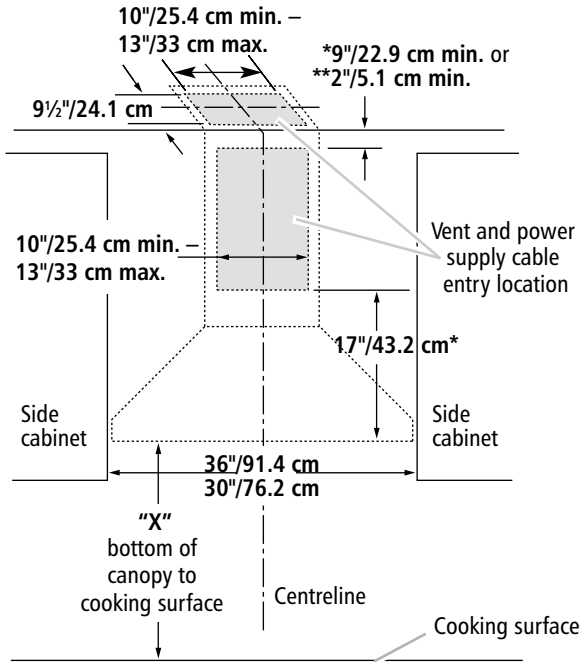

*For non-vented (recirculating) installation
**For vented installation

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 2" and 9' 2" (218.4 cm and 279.4 cm).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 4" and 9' 6" (223.5 cm and 289.6 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10272075) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXW4436Y, KXW4430Y

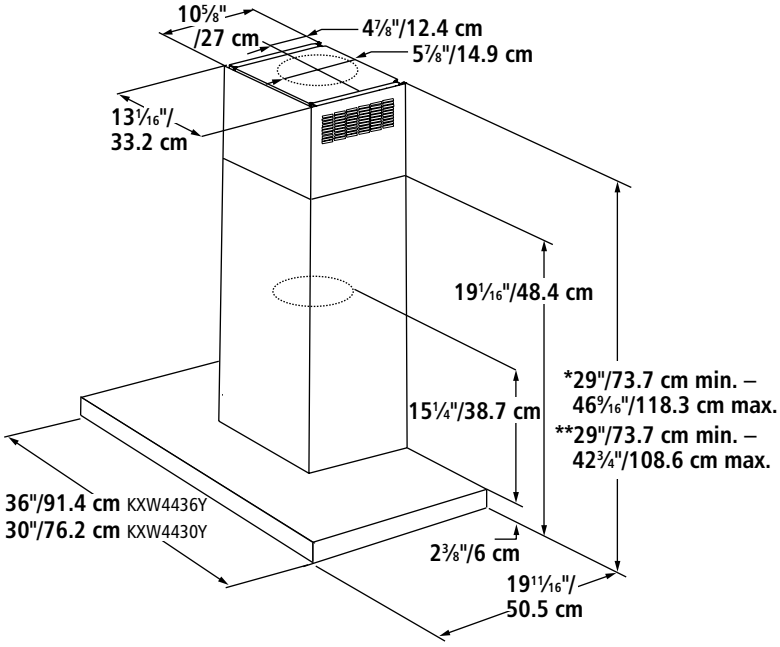

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

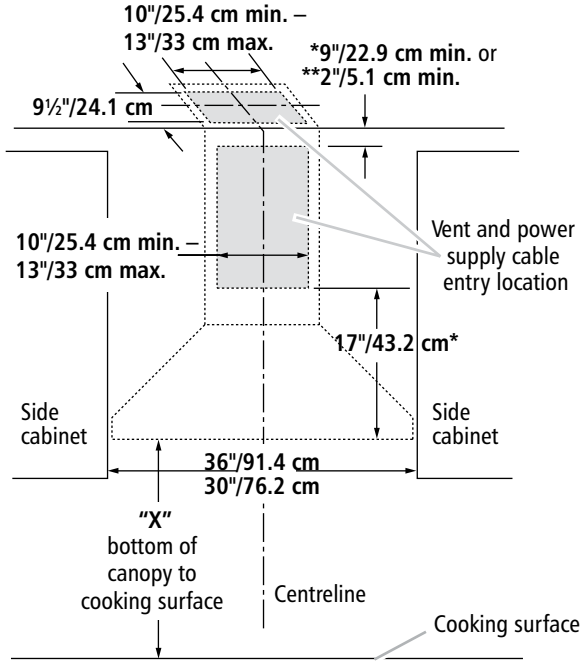

*For non-vented (recirculating) installation

**For vented installation

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 5" and 9' 6¾" (226.1 cm and 291.5 cm).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 5" and 9' 10½" (226.1 cm and 301 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10272076) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXW8748Y, KXW8736Y, KXW8730Y

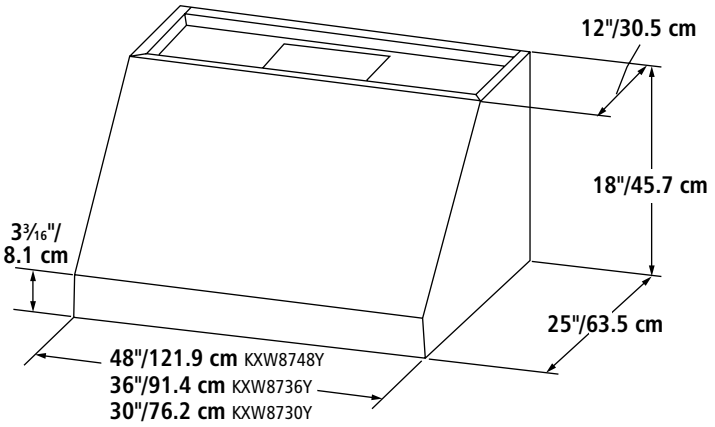

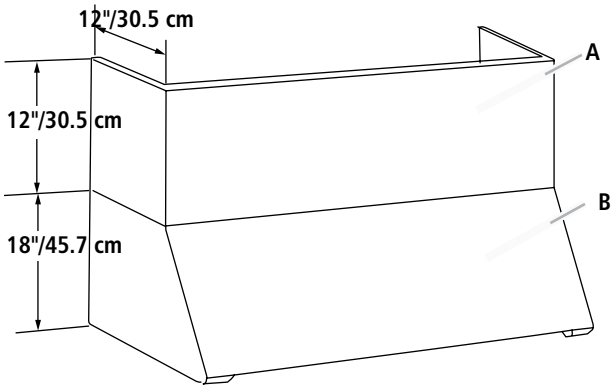

A. Optional full-width duct cover

B. Vent hood

CUTOUT DIMENSIONS

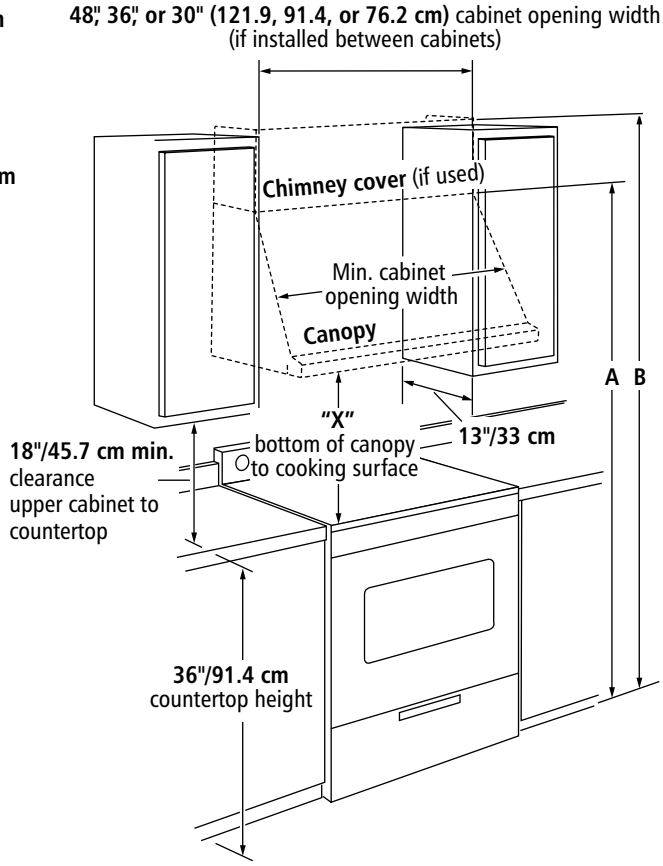
48", 36", or 30" (121.9, 91.4, or 76.2 cm) cabinet opening width
(if installed between cabinets)
Chimney cover (if used)
Min. cabinet opening width
Canopy
A B
"X"
bottom of canopy to cooking surface
13"/33 cm
18"/45.7 cm min. clearance upper cabinet to countertop
36"/91.4 cm countertop height

A. For installation with canopy only:

78" (198.1 cm) minimum above electric cooking surface

84" (213.4 cm) minimum above gas cooking surface

B. For installation with optional chimney cover:

90" (228.6 cm) minimum above electric cooking surface

96" (243.8 cm) minimum above gas cooking surface

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXW9748Y, KXW9736Y

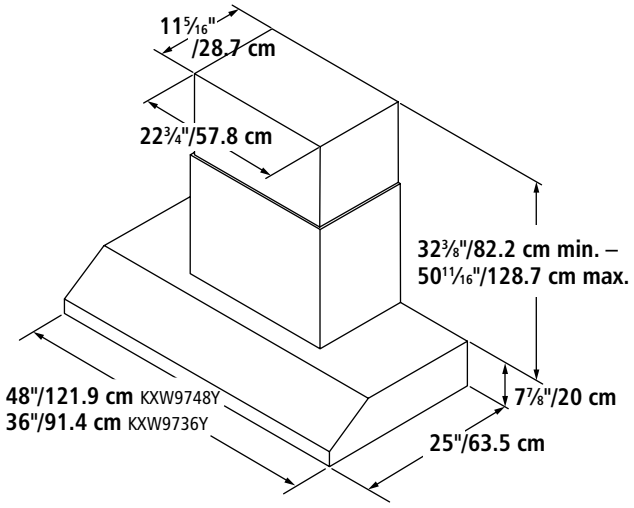

CUTOUT DIMENSIONS

48"/121.9 cm or 36"/91.4 cm cabinet opening width
(if installed between cabinets)

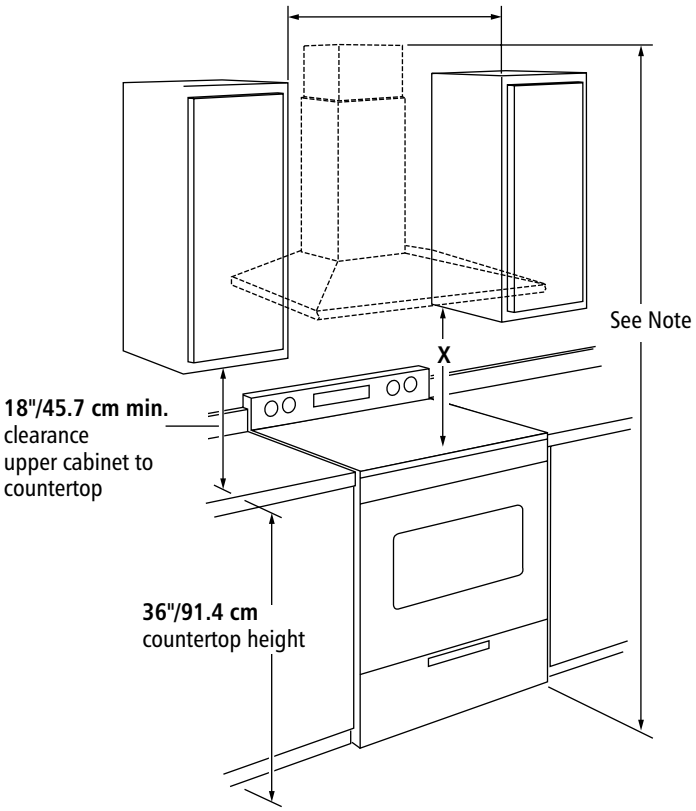

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 8' 2 3/8" and 8' 10 15/16" (250 cm and 271.6 cm) for gas and between 7' 8 3/8" and 8' 4 3/16" (234.6 cm and 254.4 cm) for electric.

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10352733) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Slide-Out Ventilation

PRODUCT DIMENSIONS

KXU2836Y, KXU2830Y

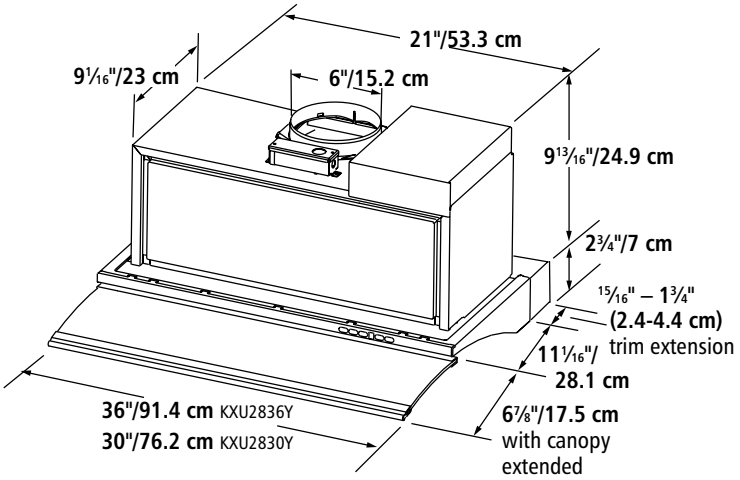

CUTOUT DIMENSIONS

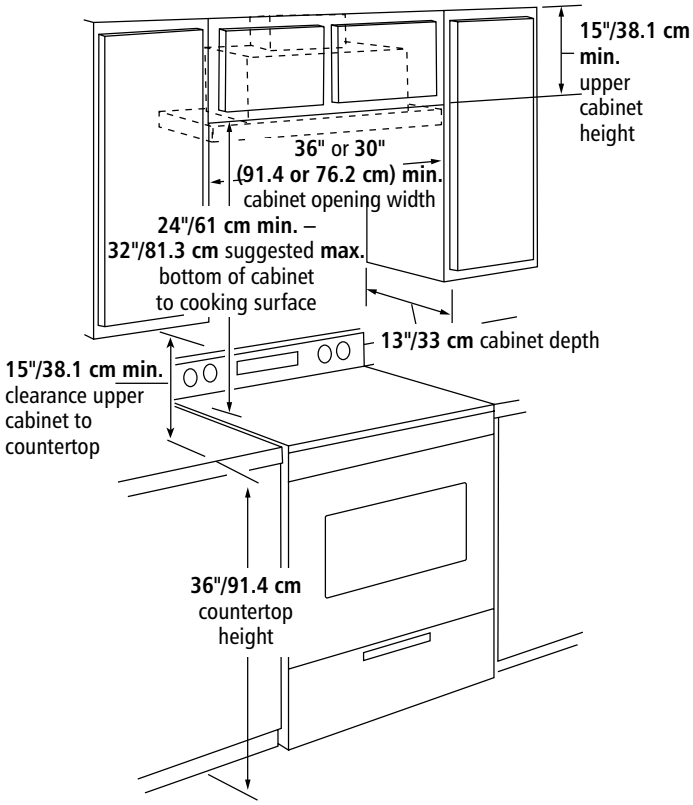

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Under-the-Cabinet Hoods

PRODUCT DIMENSIONS

KXU8036Y, KXU8030Y

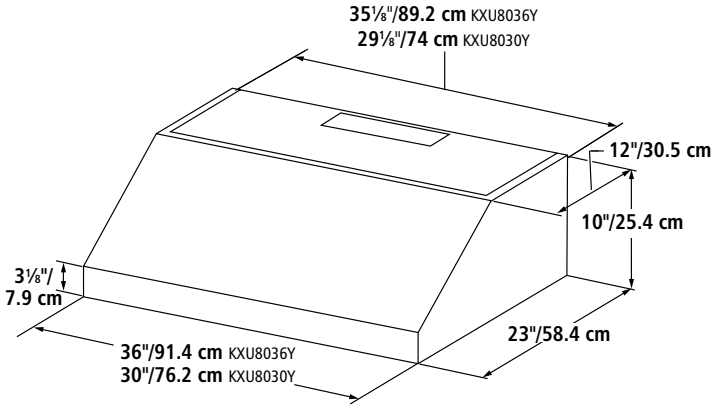

PRODUCT DIMENSIONS

KXU4236Y, KXU4230Y

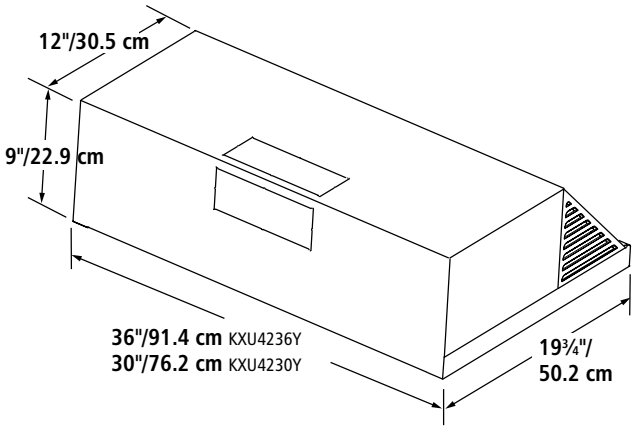

CUTOUT DIMENSIONS

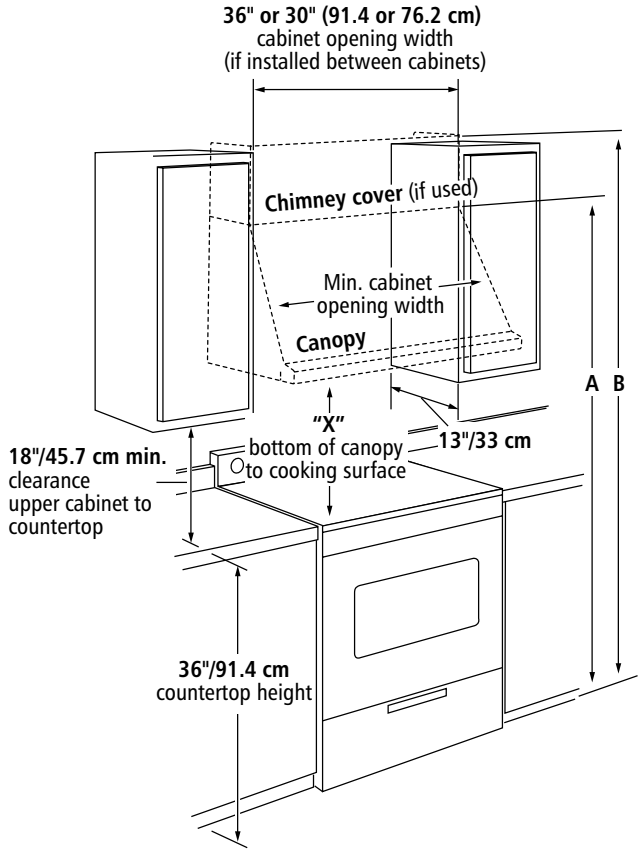

A. For installation with canopy only:

70" (177.8 cm) minimum above electric cooking surface

76" (193 cm) minimum above gas cooking surface

B. For installation with optional chimney cover:

82" (208.3 cm) minimum above electric cooking surface

88" (223.5 cm) minimum above gas cooking surface

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

CUTOUT DIMENSIONS

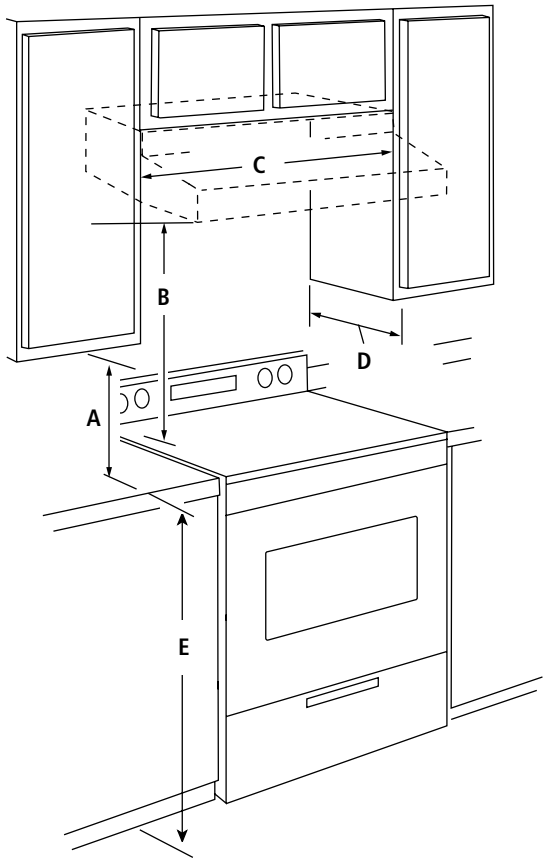

A. 18" (45.7 cm) min. clearance – upper cabinet to countertop

B. 24" (61 cm) min. from electric cooking surface, 27" (68.6 cm) min. from gas cooking surface, 36" (91.4 cm) suggested maximum – bottom of hood to cooking surface

C. 36" (91.4 cm) or 30" (76.2 cm) cabinet opening width

D. 13" (33 cm) cabinet depth

E. 36" (91.4 cm) base cabinet height

Island-Mount Canopy Hoods

PRODUCT DIMENSIONS

KXI2536Y

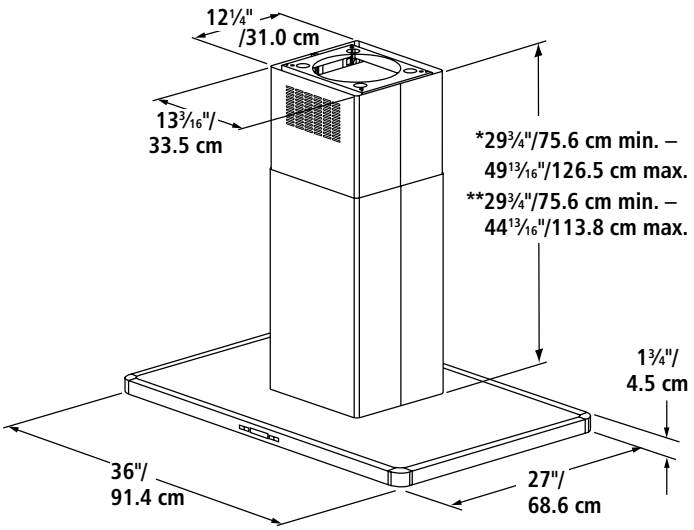

*For non-vented (recirculating) installation
**For vented installation

CUTOUT DIMENSIONS

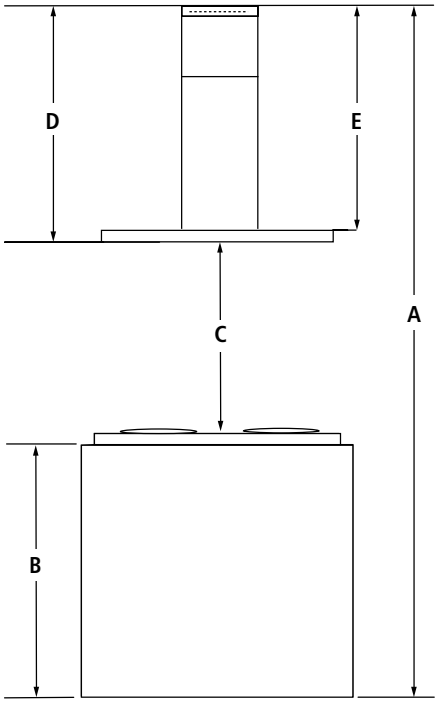

A. Ceiling height

B. Countertop height

C. Hood height: 24" (61 cm) from electric cooking surface, 27" (68.6 cm) from gas cooking surface, suggested 36" (91.4 cm) maximum

D. Hood height from ceiling to bottom of the hood: A-B-C=D

E. D-2⅜" (6 cm) chimney assembly height

IMPORTANT: Minimum distance "C": 24" (61 cm) from electric cooking surface
Minimum distance "C": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "C": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 8' 3⅞" and 9' 6¾" (253.7 cm and 291.5 cm).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 8' 3⅞" and 9' 10⁹⁄₁₆" (253.7 cm and 301.1 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "C" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10272078) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Island-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXI4336Y

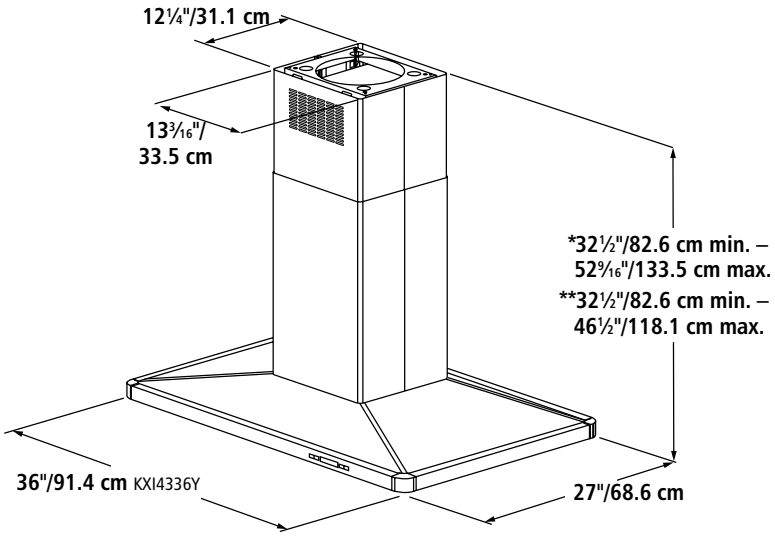

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

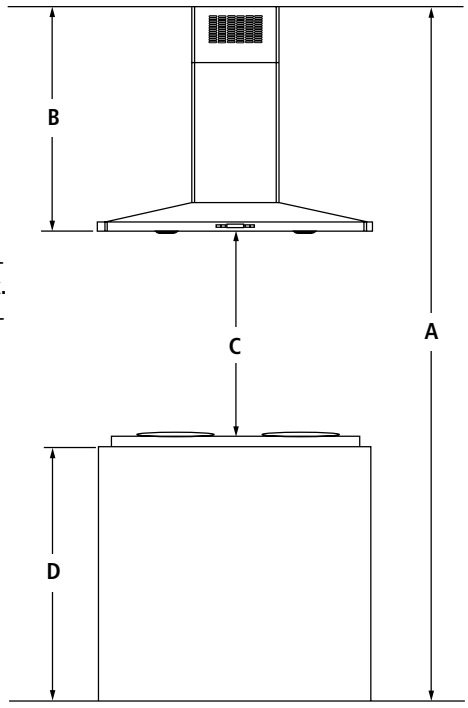

A. Ceiling height

B. Hood height from ceiling to bottom of the hood: A-C-D=B

C. Hood height: 24" (61 cm) from electric cooking surface, 27" (68.6 cm) from gas cooking surface, suggested 36" (91.4 cm) maximum

D. Countertop height

IMPORTANT: Minimum distance "C": 24" (61 cm) from electric cooking surface
Minimum distance "C": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "C": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 8½" and 9' 10½" (234.9 cm and 301 cm).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 8½" and 10' 4½" (234.9 cm and 316.2 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "C" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10294735) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Island-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXI9748Y, KXI9736Y

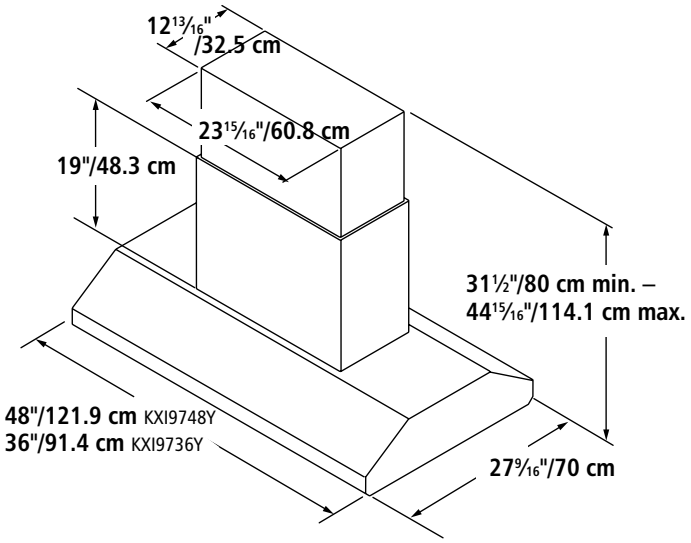

CUTOUT DIMENSIONS

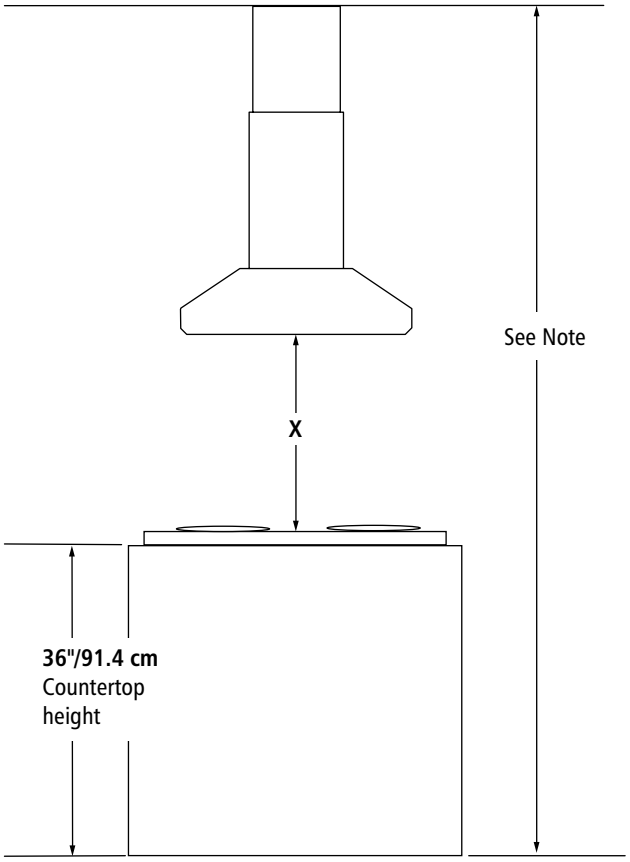

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 7½" and 9' 8⅞" (232.4 cm and 297 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10352732) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Custom Hood Liners

PRODUCT DIMENSIONS

UXL6048Y, UXL6036Y

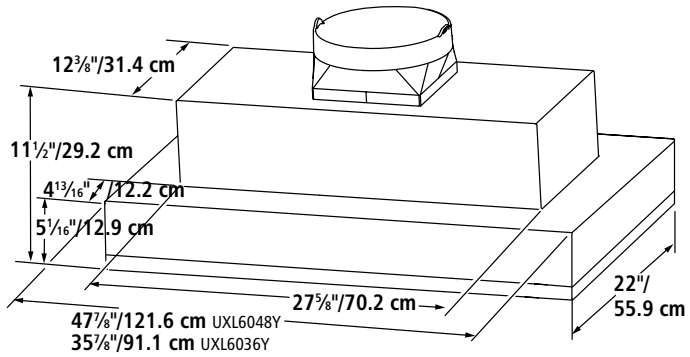

CUTOUT DIMENSIONS

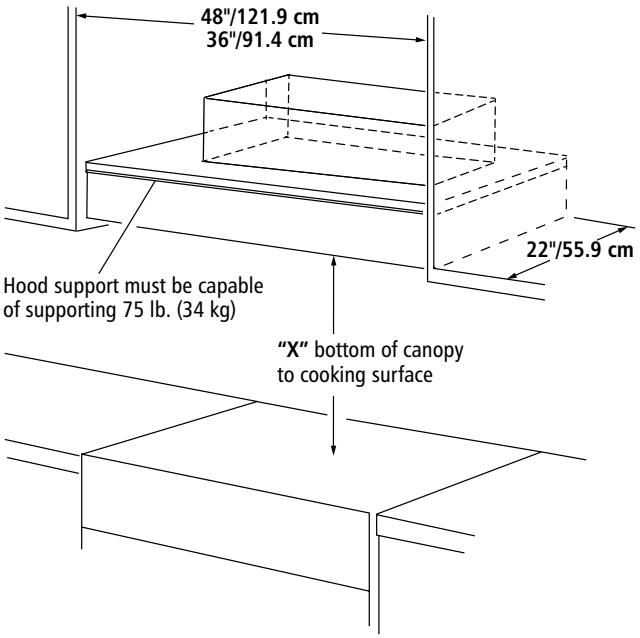

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

Retractable Downdraft Ventilation Systems

Fit under standard-sized cabinets

PRODUCT DIMENSIONS

With Interior-Mounted Power System
KIRD861V, KIRD801V

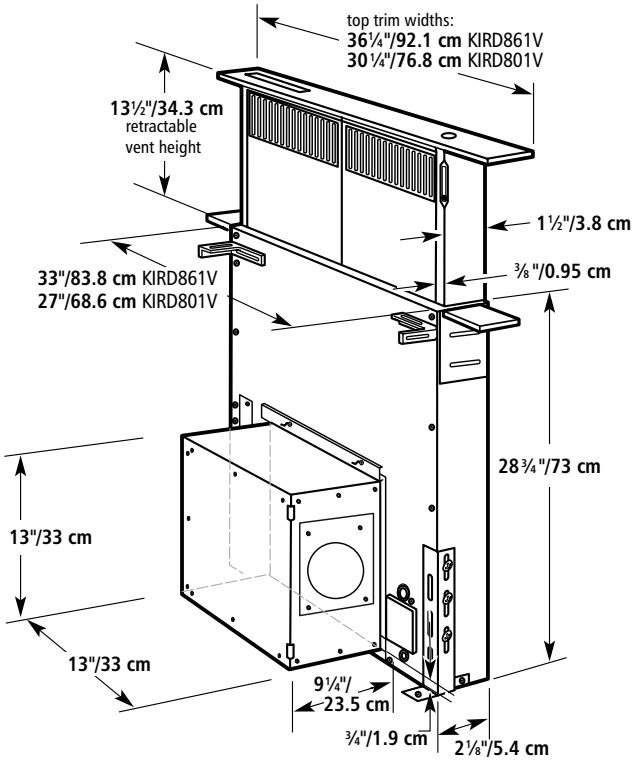

CUTOUT DIMENSIONS

CABINET OPENING
KIRD861V, KIRD801V

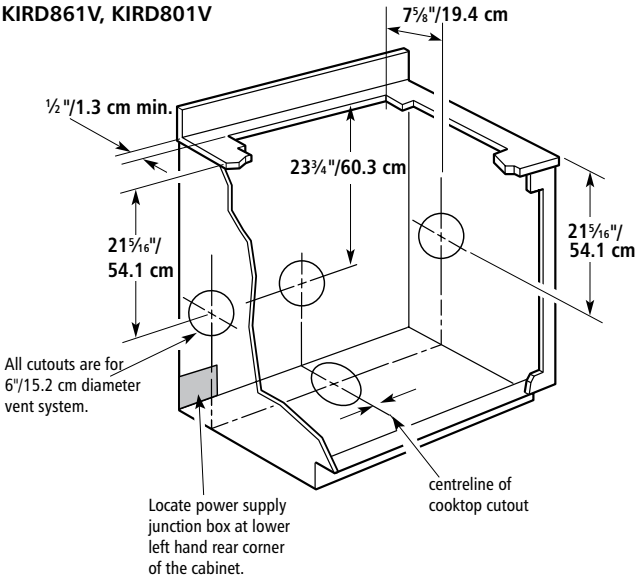

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

No one knows the kitchen like KitchenAid®.

KitchenAid®

FOR THE WAY IT'S MADE.®

®Registered Trade-mark/™ Trade-mark of KitchenAid U.S.A. The mixer shape is a registered trade-mark of KitchenAid U.S.A., KitchenAid Canada licensee in Canada. All other trade-marks are owned by their respective companies. ©2011. All rights reserved. KitchenAid • Mississauga, Ontario L5N 3A7 Printed in Canada 08/2011

KitchenAid.ca